



NOTES:

- A. REINFORCEMENT: 6X6X10X10 WIRE GAGE IN WALL AND FLOORS.  
#4 BARS AT 1'-0" ON CENTER EACH WAY IN LID.
- B. 4000 PSI 28 DAY COMPRESSIVE STRENGTH CONCRETE.
- C. CASTINGS ARE DELIVERED LOOSE AND TO BE POURED IN FINISHED FLOOR.

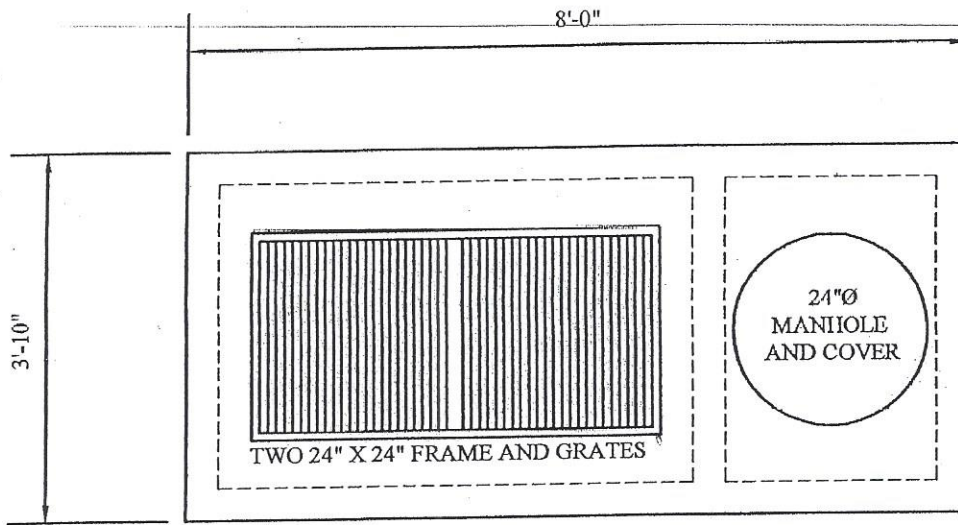

PLAN- TOP SLAB

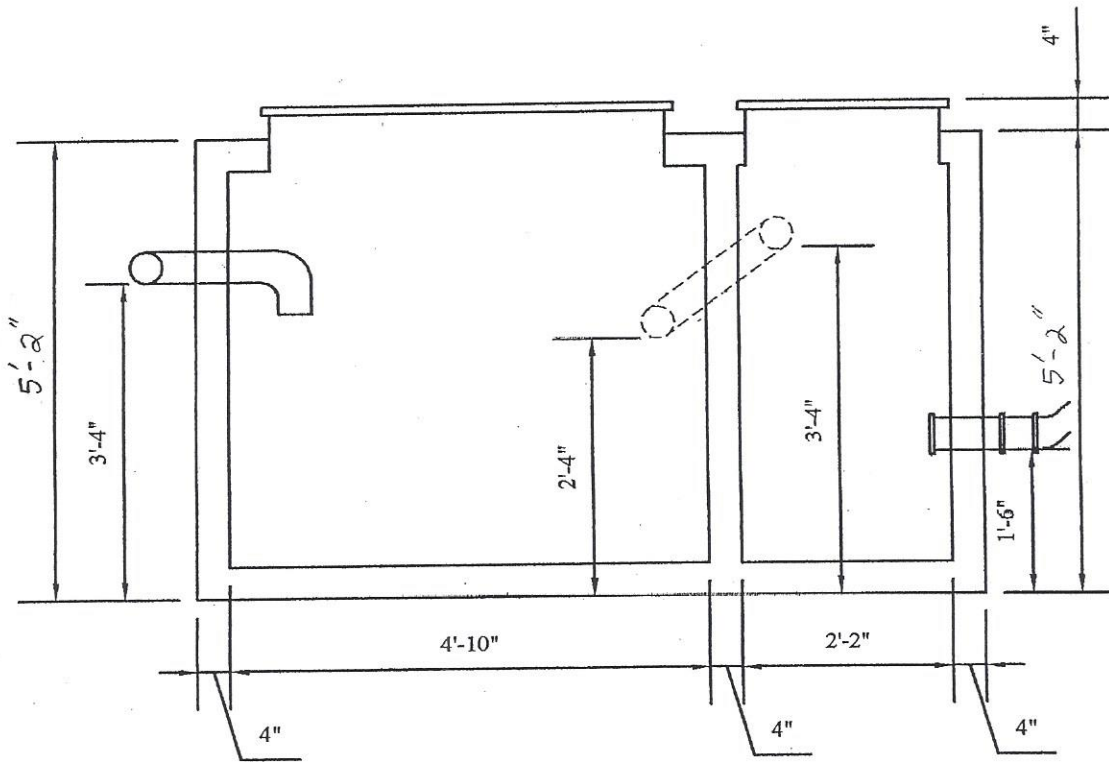

SECTION

LISTER INDUSTRIES	LISTER INDUSTRIES	DATE:2/2/10	CONCRETE SAND TRAP
-------------------	-------------------	-------------	--------------------